

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (11-00)
Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 298-147
First Inventor Steinbichler
Title PROCESS AND APPARATUS FOR ...
Express Mail Label No. EV035533274US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Applicant claims small entity status.
See 37 CFR 1.27.
3. ☒ Specification [Total Pages 18]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to sequence listing, a table, or a computer program listing appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
4. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 3]
5. Oath or Declaration [Total Pages]
 - a. ☐ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63 (d))
(for continuation/divisional with Box 18 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
6. ☐ Application Data Sheet. See 37 CFR 1.76

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
8. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Form (CRF)
 - b. Specification Sequence Listing on:
 - i. ☐ CD-ROM or CD-R (2 copies); or
 - ii. ☐ paper
 - c. ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
13. ☒ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Request and Certification under 35 U.S.C. 122 (b)(2)(B)(i). Applicant must attach form PTO/SB/35 or its equivalent.
17. ☒ Other: Check for \$433

18. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)

Prior application information:

Examiner

of prior application No.:

Group Art Unit:

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

19. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or



Correspondence address below

Name Rocco S. Barrese, Esq.
Address DILWORTH & BARRESE, LLP
333 Earle Ovington Blvd.
City Uniondale State New York Zip Code 11553
Country U.S.A Telephone (516) 228-8484 Fax (516) 228-8516

Name (Print/Type) George M. Kaplan Registration No. (Attorney/Agent) 28,375
Signature *George M. Kaplan* Date Nov. 28, 2001

CERTIFICATION UNDER 37 C.F.R. § 1.10

I hereby certify that this correspondence and the documents referred to as enclosed are being deposited with the United States Postal Service on date below in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EV035533274US addressed to: Assistant Commissioner for Patents, Box PCT, P.O. Box 2327, Arlington, Va 22202.

Dated: Nov. 28, 2001

George M. Kaplan
George M. Kaplan

11-30-01

A

PATENT

Atty. Docket No. 298-147

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Assistant Commissioner for Patents
Washington, D.C. 20231

UTILITY APPLICATION FEE TRANSMITTAL

11/28/01
09/996239
Jc971 U.S. PTO

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Hans Steinbichler, Volker Rasenberger, Rainer
Huber and Roman Berger

For: PROCESS AND APPARATUS FOR RECORDING THE
DEFORMATION OF OBJECTS

Enclosed are:

- [x] 13 page(s) of specification
- [x] 1 page(s) of Abstract
- [x] 4 page(s) of claims
- [x] 1 page(s) of Translation of Fig. 2
- [x] 2 sheets of drawings [x] formal []informal (Figs 1 and 2)
- [x] 4 page(s) of Preliminary Amendment and marked-up copy
- [] page(s) of Declaration and Power of Attorney
- [] An Assignment of the invention to

CERTIFICATION UNDER 37 C.F.R. § 1.10

I hereby certify that this correspondence and the documents referred to as enclosed are being deposited with the United States Postal Service on date below in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EV035533274US addressed to: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

November 28, 2001

Date

George M. Kaplan

[] This application claims the benefit under 35 U.S.C. §119(e) of U.S. Provisional Application(s) No(s)..
APPLICATION NO(S)..
FILING DATE

[x] Certified copy of application(s)

<u>Country</u>	<u>Appln. No.</u>	<u>Filed</u>
Germany	100 58 887.5	November 29, 2000
Germany	101 01 057.5	January 11, 2001

from which priority under Title 35 United States Code, § 119 is claimed

[] is enclosed.

[X] will follow.

CALCULATION OF UTILITY APPLICATION FEE*

For	Number Filed	Number Extra	Rate	Basic Fee
Total				\$ 740.00
Claims	27 - 20 = 7		x \$ 18.00	\$ 126.00
Independent				
Claims	2 - 3 = 0		x \$ 84.00	\$ 0.00
Multiple	[] yes	Add'l. Fee	\$280.00	\$
Dependent				
Claims	[x] no	Add'l. Fee	None	= \$
			TOTAL	\$ 866.00

[X] Small Entity Status Under 37 C.F.R. § 1.27.
Reduced fees under 37 C.F.R. § 1.9(f) (50% of 866.00 total) paid herewith \$433.00.

[] The amount of \$40.00 for recording the attached Assignment is included in a separate check.

* Based upon accompanying Preliminary Amendment


** includes all independent and single dependent claims and all claims referred to in multiple claims. See 37 C.F.R. § 1.75(c).

[x] A check in the amount of \$ 433.00 to cover the
[] recording, [X] filing fee(s) is attached.

[] Charge fee to Deposit Account No. 04-1121. Order No.
TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

[X] Please charge any deficiency as well as any other fee(s)
which may become due under 37 C.F.R. § 1.16 and 1.17, at any
time during the pendency of this application, or credit any
overpayment of such fee(s) to Deposit Account No. 04-1121.
Also, in the event any extensions of time for responding are
required for the pending application(s), please treat this
paper as a petition to extend the time as required and
charge Deposit Account No. 04-1121 therefor. TWO (2) COPIES
OF THIS SHEET ARE ENCLOSED.

Date: November 28, 2001


George M. Kapan
Reg. No. 28,375

DILWORTH & BARRESE
333 Earle Ovington Blvd.
Uniondale, NY 11553
Tel. No. (516) 228-8484
Fax. (516) 228-8516

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): Steinbichler et al.

Examiner:

Serial No.: Not yet assigned

Group Art Unit:

Filed: herewith

Docket: 298-147

For: PROCESS AND APPARATUS FOR
RECORDING THE DEFORMATION...

Dated: November 28, 2001

Assistant Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Please enter the following Preliminary Amendment in the above-identified application:

IN THE SPECIFICATION:

Page 1, between lines 2 and 3 (underneath the title) insert - -BACKGROUND OF THE INVENTION- -;

Page 2, between lines 12 and 13 insert - -SUMMARY OF THE INVENTION- -;


Page 2, change lines 17-29 to read as follows:

- -According to the invention, this task is achieved in the case of a process of the generic type mentioned at the beginning, by the following characteristics. During the deformation of the object, a sequence or series of images of the object is recorded with a measuring process. The differential (increment) between two sequential images is

CERTIFICATION UNDER 37 C.F.R. § 1.10

I hereby certify that this correspondence and the documents referred to as enclosed are being deposited with the United States Postal Service on date below in an envelope as "Express Mail Post Office to Addressee" Mail Label Number **EV035533274US** addressed to: Assistant Commissioner for Patents, Box PCT, P.O. Box 2327, Arlington, Va 22202.

Dated: November 28, 2001


George M. Kaplan

formed and this is then added to the first image. In the subsequent series of operations performed in the process, the differentials are formed between each two sequential images, and these differentials are added to the preceding image in each case. In this way, the incremental deformations are thus added to together, i.e., integrated. The integrated differentials yield the total deformation of the object.- -;

Page 3, change lines 24-25 to read as follows:

- -Preferred Embodiments of the invention are described herein.- -;

Page 7, change lines 26-27 (last two lines) to read as follows:

- -Preferred embodiments of the apparatus according to the invention are described below.

BRIEF DESCRIPTION OF THE DRAWINGS- -; and

Page 8, between lines 6 and 7 insert - -DESCRIPTION OF THE PREFERRED EMBODIMENTS- -.

IN THE CLAIMS:

Amend Claims 4,6-8, 11, 12, 15-17 19 and 23-27 as follows:

4. Process according to Claim 1, characterized in that phase images are determined from the images.

6. Process according to Claim 1, characterized in that the object (1) is irradiated with coherent radiation or coherent light, particularly laser light, or with partially coherent radiation or partially coherent light.

7. Process according to Claim 1, characterized in that the object is irradiated by a laser diode.

8. Process according to Claim 1, characterized in that the object is irradiated by several laser diodes.

11. Process according to Claim 1, characterized in that the images or phase images of the object are recorded by a hand-held sensor (2).

12. Process according to Claim 1, characterized in that a disrupted image or phase image, or the differential formed therefrom, is precluded from the evaluation stage.

15. Process according to Claim 1, characterized in that the recorded images or phase images or the differentials formed therefrom, is visualized as a film.

16. Process according to Claim 1, characterized in that timeframes or phases of the deformation can be compared with one another.

17. Process according to Claim 1, characterized in that the whole-body deformation or an undesired deformation is subtracted from the total deformation.

19. Process according to Claim 17, characterized in that the subtraction of the whole-body deformation or undesired deformation from the total deformation in the images or phase images is performed prior to formation of the sum of the differentials between the images or phase images.

23. Apparatus according to Claim 20, characterized by a device for determining phase images from the recorded images.

24. Apparatus according to Claim 20, characterized in that the measuring device encompasses a source for coherent radiation or coherent light or partially coherent radiation or partially coherent light.

25. Apparatus according to Claim 20, characterized by one or several laser diodes.
26. Apparatus according to Claim 20, characterized by a hand-held sensor.
27. Apparatus according to Claim 20, characterized by a device for visualization of the recorded images or phase images as a film.

REMARKS:


The claims in the application are 1-27.

Favorable consideration of the application as amended is respectfully requested.

The claims have been amended to eliminate all multiple dependencies with the specification being amended to eliminate informalities (a marked-up copy is enclosed).


Early favorable action is earnestly solicited.

Respectfully submitted,


George M. Kaplan
Registration No.: 28,375
Attorney for Applicant(s)

DILWORTH & BARRESE, LLP
333 Earle Ovington Blvd.
Uniondale, New York 11553
(516)228-8484

Fig. 2

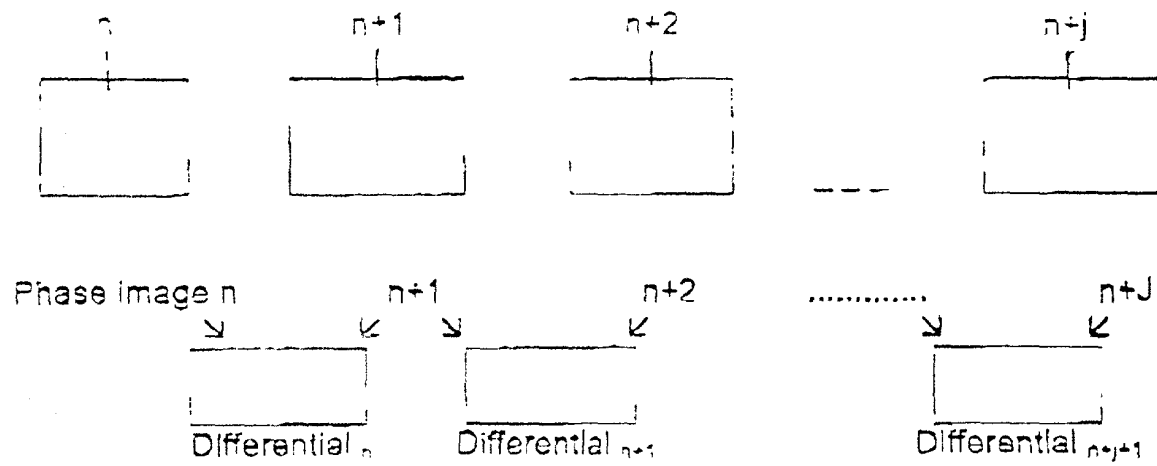

Differential between phase image $n+j$ and phase image n

$$= \sum_{j=n}^{n+j-1} \text{Differential}_j$$

$$j = n (n+j-1)$$

In the process according to the invention, a relatively large number of images are recorded per unit time. In the practical application of the process, it is possible to record the images at the normal video clock frequency of 25 frames per second.

However, it is also possible to apply different image frequencies. In the case of slow deformations, image frequencies of one frame per minute or even lower may be applied. However, it is also possible to record the images at higher frequencies of up to one million frames per second.

In this process, a certain image is used as the starting image. Then the differentials of two sequential images are calculated and successively added together. As a relatively large number of images are recorded per unit time, these images differ by only a comparatively small degree of deformation in each case. The images are recorded during application of the load, i.e. during the advancing deformation process. As a relatively large number of images is recorded per unit time, the interference lines or projection lines are far enough away from each other in order to ensure that they can always be readily evaluated. The deformations are added together, i.e. integrated. In this way, it is also possible to record large deformations.

Preferred embodiments of the invention are described ^{H&Rt} in the ~~subordinate claims~~.

The images of the object can be recorded by means of an interferometry process. Suitable interferometry processes include, for example, holographic interferometry, electronic speckle pattern interferometry (ESPI) or speckle shearing

appertaining to the disrupted image or phase image is extrapolated from the adjacent time intervals. The missing interval is replaced by the preceding differential and/or the following differential.

In order to be able to perform an evaluation even in the case of a discounted image or phase image, the resolution should be selected such that it is still possible to effectively distinguish between the interference lines or projection lines if an image is omitted. The theoretical minimum interval between two adjacent lines is two pixels. In order to ensure reliable evaluation, however, the interval between two adjacent lines should be at least four or five pixels. This will ensure that the lines are still readily distinguishable even if an image or phase image should be omitted.

The recorded images or phase images can be visualised as a film.

It is possible to compare any timeframes of the deformation with one another.

The task on which the invention is based is achieved in the case of an apparatus for recording the deformation of objects by a measuring device for recording a sequence of images of the object during the deformation of said object, and by an evaluation device for forming the differential between two sequential images and for integrating the differential.

Preferred embodiments of the apparatus according to the invention are described ^{below} ~~in the further subordinate claims.~~

focal plane generated by the coherent radiation on the body covers at least three sensor elements (pixels). This ensures that a complete phase measurement is possible with a single frame. The phase of the radiation from the object is determined by intensity signals from the sensor elements.

In the prior-art processes for recording the deformation of objects, difficulties can arise if the deformations are relatively large. In this case, the intervals between the various interference lines may be very small with the result that they can only be distinguished with difficulty, or may not be distinguishable at all, so hampering or negating evaluation.

The task of the invention is to introduce a process and an apparatus of the type mentioned at the beginning which facilitates reliable evaluation even in the case of relatively large deformations.

According to the invention, this task is achieved in the case of a process of the generic type mentioned at the beginning, by the ^{FOLLOWING} characteristics of ~~Claim 1~~. During the deformation of the object, a sequence or series of images of the object is recorded with a measuring process. The differential (increment) between two sequential images is formed and this is then added to the first image. In the subsequent series of operations performed in the process, the differentials are formed between each two sequential images, and these differentials are added to the preceding image in each case. In this way, the incremental deformations are thus added together, i.e. integrated. The integrated differentials yield the total deformation of the object.

Claims

1. Process for recording the deformation of objects (1),

in which a sequence of images of the object (1) is recorded with a measuring process during the deformation process,

the differential is formed between two sequential images (n, n + 1, n + 2)

and this differential is added to the first image.
2. Process according to Claim 1, characterised in that the images of the object (1) are recorded with an interferometry process, preferably with holographic interferometry or electronic speckle pattern interferometry (ESPI) or with speckle shearing interferometry.
3. Process according to Claim 1, characterised in that the images of the object (1) are recorded with a projection process, preferably with a grid projection process or with a Moiré process.
4. Process according to ~~one of the preceding~~ Claims¹, characterised² in that phase images are determined from the images.
5. Process according to Claim 4, characterised in that the phase image is determined from one image.

6. Process according to ~~one of the preceding Claims~~¹, characterised² in that the object (1) is irradiated with coherent radiation or coherent light, particularly laser light, or with partially coherent radiation or partially coherent light.
7. Process according to ~~one of the preceding Claims~~¹, characterised² in that the object is irradiated by a laser diode.
8. Process according to ~~one of Claims 1 to 6~~², characterised² in that the object is irradiated by several laser diodes.
9. Process according to Claim 8, characterised in that the illumination areas of the laser diodes do not overlap.
10. Process according to Claim 8, characterised in that the illumination areas of the laser diodes overlap.
11. Process according to ~~one of the preceding Claims~~¹, characterised in that the images or phase images of the object are recorded by a hand-held sensor (2).
12. Process according to ~~one of the preceding Claims~~¹, characterised in that a disrupted image or phase image, or the differential formed therefrom, is precluded from the evaluation stage.
13. Process according to Claim 12, characterised in that the disrupted image or phase image or the differential formed therefrom is ignored.

14. Process according to Claim 12, characterised in that the gap caused by the disrupted image or phase image, or the disrupted differential, is filled by the preceding and/or subsequent differential.
15. Process according to ~~one of the preceding Claims~~¹, characterised in that the recorded images or phase images ~~or~~⁺ the differentials formed therefrom, is visualised as a film.
16. Process according to ~~one of the preceding Claims~~¹, characterised in that timeframes or phases of the deformation can be compared with one another.
17. Process according to ~~one of the preceding Claims~~¹, characterised in that the whole-body deformation or an undesired deformation is subtracted from the total deformation.
18. Process according to Claim 17, characterised in that the undesired deformation is determined from a reference measurement.
19. Process according to Claim 17 ~~or 18~~⁺, characterised in that the subtraction of the whole-body deformation or undesired deformation from the total deformation in the images or phase images is performed prior to formation of the sum of the differentials between the images or phase images.
20. Apparatus for recording the deformation of objects (1) with a measuring device (2) for recording the sequence of images of the object (1) during the deformation of

said object, and with an evaluation device for forming the differential between two sequential images and for integrating the differential.

21. Apparatus according to Claim 20, characterised in that the measuring device exhibits an interferometry device.
22. Apparatus according to Claim 20, characterised in that the measuring device features a projection device.
23. Apparatus ~~according to one of Claims 20 to 22,~~ characterised by a device for determining phase images from the recorded images.
24. Apparatus ~~according to one of Claims 20 to 23,~~ characterised in that the measuring device encompasses a source for coherent radiation or coherent light or partially coherent radiation or partially coherent light.
25. Apparatus ~~according to one of Claims 20 to 24,~~ characterised by one or several laser diodes.
26. Apparatus ~~according to one of Claims 20 to 25,~~ characterised by a hand-held sensor.
27. Apparatus ~~according to one of Claims 20 to 26,~~ characterised by a device for visualisation of the recorded images or phase images as a film.

Process and apparatus for recording the deformation of objects

The invention entails a process for recording the deformation of objects and an apparatus for performing the type of process concerned.

Processes and facilities of this type are used for a wide range of purposes, particularly in the non-destructive testing of materials, and especially of composite materials, and in the testing of tyres (motor vehicle tyres). An object, for example a material, composite material, workpiece, tyre or similar, is deformed through the influence of pressure, vacuum, heat or some other means. The object is measured in various states of deformation. Using the measurements, it can be determined whether the object exhibits a defect, and particularly a flawed area.

In tyre testing, the tyre may be placed in a vacuum chamber. The tyre may be mounted on the rim or placed in the vacuum chamber without a rim. As the pressure is reduced, the air enclosed in a flawed area in the tyre leads to local expansion which can be detected by measurement.

A process for measuring the surface of a 3D body is known from EP 419 936 B1. According to this process, an object can be irradiated with coherent radiation, and in particular a beam of light. The reflected radiation is imaged in a focal plane by an imaging optics system, in which plane is located a planar sensor or an image sensor, preferably a CCD sensor. A reference beam with a carrier frequency is superimposed on the sensor. In this case, the imaging optics system is designed or adjusted such that the image of a speckle in the

focal plane generated by the coherent radiation on the body covers at least three sensor elements (pixels). This ensures that a complete phase measurement is possible with a single frame. The phase of the radiation from the object is determined by intensity signals from the sensor elements.

In the prior-art processes for recording the deformation of objects, difficulties can arise if the deformations are relatively large. In this case, the intervals between the various interference lines may be very small with the result that they can only be distinguished with difficulty, or may not be distinguishable at all, so hampering or negating evaluation.

The task of the invention is to introduce a process and an apparatus of the type mentioned at the beginning which facilitates reliable evaluation even in the case of relatively large deformations.

According to the invention, this task is achieved in the case of a process of the generic type mentioned at the beginning, by the characteristics of Claim 1. During the deformation of the object, a sequence or series of images of the object is recorded with a measuring process. The differential (increment) between two sequential images is formed and this is then added to the first image. In the subsequent series of operations performed in the process, the differentials are formed between each two sequential images, and these differentials are added to the preceding image in each case. In this way, the incremental deformations are thus added together, i.e. integrated. The integrated differentials yield the total deformation of the object.

In the process according to the invention, a relatively large number of images are recorded per unit time. In the practical application of the process, it is possible to record the images at the normal video clock frequency of 25 frames per second.

However, it is also possible to apply different image frequencies. In the case of slow deformations, image frequencies of one frame per minute or even lower may be applied. However, it is also possible to record the images at higher frequencies of up to one million frames per second.

In this process, a certain image is used as the starting image. Then the differentials of two sequential images are calculated and successively added together. As a relatively large number of images are recorded per unit time, these images differ by only a comparatively small degree of deformation in each case. The images are recorded during application of the load, i.e. during the advancing deformation process. As a relatively large number of images is recorded per unit time, the interference lines or projection lines are far enough away from each other in order to ensure that they can always be readily evaluated. The deformations are added together, i.e. integrated. In this way, it is also possible to record large deformations.

Preferred embodiments of the invention are described in the subordinate claims.

The images of the object can be recorded by means of an interferometry process. Suitable interferometry processes include, for example, holographic interferometry, electronic speckle pattern interferometry (ESPI) or speckle shearing

interferometry. The images of the object can, however, also be recorded by means of a projection process. This may take the form of, in particular, a grid projection process or a Moiré process.

Phase images can be determined from the recorded images. In this case, the differentials between sequential phase images are formed and these differentials are then added to the preceding phase image in each case. The phase images can be determined, for example, according to the process described in EP 419 936 B1, to which express reference is hereby made. According to this process, the phase image is determined from the image on the CCD sensor in a fashion as already explained above, i.e. the phase image is determined from a single frame. From the directly recorded deformation images or interference line images are calculated phase images which are then evaluated using the described incrementation and integration method. If the phase image in each case is determined from a single frame, as can occur in accordance with EP 419 936 B1, the process can be significantly accelerated. It can be performed at the usual video cycle frequency.

It is possible to determine and evaluate a demodulated phase image.

A further preferred embodiment is characterised by the fact that the object is irradiated with coherent radiation or coherent light, preferably a laser light, or with partially coherent radiation or partially coherent light. In particular, the object may be irradiated by a laser diode. According to a further preferred embodiment of the invention, the object is irradiated by several laser diodes. The use of

one or several laser diodes is particularly advantageous because laser diodes are relatively inexpensive. When using several laser diodes, these may be arranged such that the areas illuminated by the laser diodes do not overlap, or only slightly overlap at the edges. It is, however, also possible to arrange the diodes such that the illuminated areas of two or several or all the laser diodes overlap.

A particular advantage of the process according to the invention lies in the fact that the images or phase images of the object may be recorded using a hand-held sensor. The sensor used for the measuring process, or the housing in which this sensor is arranged, can thus be held in the hand. This can, of course, give rise to disruptions. These disruptions, which are caused by the fact that the hand-held sensor can never be kept completely still, are however compensated for by the relatively high image frequency over time. Given a sufficiently fast sequence of individual images, it is consequently possible to use a hand-held sensor, for example a hand-guided ESPI sensor or shearing sensor, particularly in combination with an electronic shake-suppression system. The precondition here is that the image frequency is so high that the disturbances generated by holding the sensor in the hand are small by comparison. The shaking of the hand, and also other disruptions which are caused by external influences, and which can also arise with a stationary test set-up, can be averaged out over time.

A further preferred embodiment of the invention is characterised by the fact that a disrupted image or phase image is not included in the evaluation. The evaluation of the image or phase image is performed in the manner described above with the differential being formed between two

sequential images or phase images, and this differential then being added to the preceding image or phase image in each case. If an image or phase image, or the differential formed from it, is disrupted, the image or phase image, or the differential, is, according to the preferred embodiment, precluded from the evaluation.

Such a disrupted image or phase image, or such a disrupted differential, can particularly arise when using laser diodes. Laser diodes execute so-called mode jumps. These are sudden changes in wavelength, the occurrence of which is unpredictable and random. The wavelength changes suddenly by a minimal quantity. If such a mode jump occurs between two sequential images or phase images, this produces a disrupted image or phase image or a disrupted differential, and the evaluation is likewise disrupted. In order to eradicate errors caused by the mode jump or some other phenomenon, the image or phase image, or the differential, can be excluded from the evaluation.

The disrupted image or phase image, or the differential formed therefrom, can be ignored as being of negligible significance. Given a sufficiently fast sequence of individual images, the error caused by this can likewise be ignored as negligible.

However, it is also possible to fill the gap caused by the disrupted image or phase image, or the disrupted differential, by using the preceding and/or following differential. This is particularly possible in the case of essentially linear deformations and if the image sequence is so fast that approximately linear relationships prevail between sequential images. In this case the deformation

appertaining to the disrupted image or phase image is extrapolated from the adjacent time intervals. The missing interval is replaced by the preceding differential and/or the following differential.

In order to be able to perform an evaluation even in the case of a discounted image or phase image, the resolution should be selected such that it is still possible to effectively distinguish between the interference lines or projection lines if an image is omitted. The theoretical minimum interval between two adjacent lines is two pixels. In order to ensure reliable evaluation, however, the interval between two adjacent lines should be at least four or five pixels. This will ensure that the lines are still readily distinguishable even if an image or phase image should be omitted.

The recorded images or phase images can be visualised as a film.

It is possible to compare any timeframes of the deformation with one another.

The task on which the invention is based is achieved in the case of an apparatus for recording the deformation of objects by a measuring device for recording a sequence of images of the object during the deformation of said object, and by an evaluation device for forming the differential between two sequential images and for integrating the differential.

Preferred embodiments of the apparatus according to the invention are described in the further subordinate claims.

An embodiment of the invention is explained in the following on the basis of the enclosed drawing. In the drawing

Fig. 1 shows a schematic representation of a measuring device and an object, and

Fig. 2 shows the formation of differentials between sequential phase images.

As indicated in Fig. 1, an object 1, e.g. a tyre or a composite material, is continuously observed by a sensor head 2. Object 1 is deformed, e.g. by pressure, vacuum, heat or similar. Sensor head 2 can be held in the hand. It is connected via a line 3 to an evaluation unit, e.g. a PC or other computer.

The sensor head may take the form of a device which operates in accordance with the process described in EP 419 936 B1. Sensor head 2 exhibits laser diodes which irradiate object 1 with laser light 4.

Sensor head 2 continually records images of object 1. This occurs during the deformation of object 1. In order to record the images, sensor head 2 is equipped with a CCD sensor. The images are recorded at a frequency of 1,000 frames per second. This frequency is generally sufficient if sensor head 2 is hand-held. It should be noted, however, that the displacement between two sequential images must be no greater than 1 micron. This can generally be achieved in the case of hand-held sensor heads operating at a frequency of 1,000 frames per second. If sensor head 2 is fixed in position, substantially lower image frequencies may be applied. The images can then be recorded at video clock frequency (25

frames per second) or even - depending on the application - at a lower or higher frequency.

Phase images are constantly calculated from the images. This is preferably performed using the single-frame technique where one phase image is calculated from each frame. This may be performed in accordance with the process described in EP 419 936 B1. An image of object 1 in its state at rest is not necessary.

The differentials between sequential phase images describe the deformation between two frame times in each case. This is schematically represented in Fig. 2. The deformation between two random recording times is calculated from the 2π -modulated sum of the differentials of all intervening frames.

As shown in Fig. 2, the differential n is formed from the differential between the subsequent phase image $n + 1$ and the preceding phase image n . The differential $n + 1$ is formed from the then subsequent phase image $n + 2$ and the then preceding phase image $n + 1$, and so on. The differentials are, moreover, continuously added up. The sum of the integrated differentials yields the total deformation.

For each frame (each image or phase image), a series of deformation images can be calculated by calculation of the sum of all n subsequent deformations ($n = 1, 2, 3...$). As a result, the deformation can be visualised as a film or in a type of film.

Any portions of a deformation process can be individually viewed. This may be particularly advantageous if, owing to a limited lateral resolution of the sensor head, the entire

deformation is not reproducible, or if the stripe density is greater than the pixel resolution.

Disruptions that occur within the deformation process can be suppressed or bridged. If an image disturbance occurs between two frame conditions, for example due to a mode jump in the irradiation lighting, due to heat-induced striae, or due to the component and/or sensor head tilt, the disruption is not included in the evaluation. This can be ensured by ignoring the differential from the two associated images or phase images, between which the disruption has occurred when adding up the sum of the differentials, with the result that the disruption is omitted from the results pattern. This procedure enables, inter alia, the use of laser diodes instead of expensive lasers for many measurement tasks. The deformation that occurs during the suppressed period can be ignored as negligible given a sufficiently fast sequence of individual frames. In the case of linear deformations or deformations which can be regarded with sufficient approximation as linear, the deformation during the suppressed period can be extrapolated from the adjacent time intervals.

The disruptions requiring suppression can be detected within the series of deformation images either manually or automatically.

In non-destructive material testing, the atypical workpiece deformation actually being investigated is frequently superimposed by a typical "whole-body deformation". In many cases, the extent of this whole-body deformation is significantly larger than that of the sought defect in the object. Consequently it is often impossible to visualise the

defects because the superimposed global deformation already exceeds the dynamic capabilities of the measurement arrangement before the sought defect can become sufficiently apparent.

In order to render such "concealed" defects visible, a global reference area can be subtracted from each individual differential, and the corrected individual differentials can then be added together.

In addition, unwanted deformations can in many applications be separately recorded and subtracted from the combination of desired and undesired deformations which has been recorded.

This can be explained on the basis of an example in which tyres with defects are placed in a vacuum chamber. The defects increase as the pressure in the vacuum chamber decreases. They can be rendered visible by shearography. The deformation caused by the defects is the "desired" deformation that is to be determined and rendered visible. After a deformation process, which for example can be caused by placement in the test chamber, the tyres tend gradually to resume their original shape. This is then the "undesired whole-body deformation" which is superimposed on the actual atypical, desired deformation under investigation. When testing tyres, this whole-body deformation is extensively unrelated to the applied negative pressure.

By measuring the deformation in accordance with the invention during a change in negative pressure, the total deformation representing a combination of the desired and undesired components is measured. By performing a measurement (reference measurement) without a change in the negative

pressure, it is possible to determine the undesired component (undesired whole-body deformation). By subtracting the undesired deformation from the combined total deformation, it is possible to obtain the desired component of the deformation.

A prerequisite for this is that the two measurements are performed immediately one after the other and that both measurements are allowed to continue until the portion of undesired deformation is of an identical size in both cases. Alternatively, the results, for example, in accordance with the total time difference of the individual deformations, can be scaled in order to obtain the same portion of undesired deformation component before this is deducted from the combined total deformation.

Consequently, a preferred embodiment of the invention is characterised by the fact that the whole-body deformation is subtracted from the total deformation. This enables the desired deformation to be obtained. A further preferred embodiment is characterised by the fact that undesired deformations are subtracted from the total deformation. The undesired deformations are, in this case, preferably determined from reference measurements. The reference measurements can be performed without development of the desired deformation.

It is advantageous if the subtraction of the whole-body deformation or undesired deformation from the total deformation in the images or phase images is performed prior to formation of the sum of the differentials between the images or phase images. It is possible to increase the measurement dynamics by subtracting the whole-body

deformation in the individual differential images prior to integration to produce the total deformation. Preference is given to a subtraction of undesired deformations which are determined from reference measurements without development of the desired deformation.

Claims

1. Process for recording the deformation of objects (1),

in which a sequence of images of the object (1) is recorded with a measuring process during the deformation process,

the differential is formed between two sequential images (n, n + 1, n + 2)

and this differential is added to the first image.
2. Process according to Claim 1, characterised in that the images of the object (1) are recorded with an interferometry process, preferably with holographic interferometry or electronic speckle pattern interferometry (ESPI) or with speckle shearing interferometry.
3. Process according to Claim 1, characterised in that the images of the object (1) are recorded with a projection process, preferably with a grid projection process or with a Moiré process.
4. Process according to one of the preceding Claims, characterised in that phase images are determined from the images.
5. Process according to Claim 4, characterised in that the phase image is determined from one image.

6. Process according to one of the preceding Claims, characterised in that the object (1) is irradiated with coherent radiation or coherent light, particularly laser light, or with partially coherent radiation or partially coherent light.
7. Process according to one of the preceding Claims, characterised in that the object is irradiated by a laser diode.
8. Process according to one of Claims 1 to 6, characterised in that the object is irradiated by several laser diodes.
9. Process according to Claim 8, characterised in that the illumination areas of the laser diodes do not overlap.
10. Process according to Claim 8, characterised in that the illumination areas of the laser diodes overlap.
11. Process according to one of the preceding Claims, characterised in that the images or phase images of the object are recorded by a hand-held sensor (2).
12. Process according to one of the preceding Claims, characterised in that a disrupted image or phase image, or the differential formed therefrom, is precluded from the evaluation stage.
13. Process according to Claim 12, characterised in that the disrupted image or phase image or the differential formed therefrom is ignored.

14. Process according to Claim 12, characterised in that the gap caused by the disrupted image or phase image, or the disrupted differential, is filled by the preceding and/or subsequent differential.
15. Process according to one of the preceding Claims, characterised in that the recorded images or phase images or the differentials formed therefrom, is visualised as a film.
16. Process according to one of the preceding Claims, characterised in that timeframes or phases of the deformation can be compared with one another.
17. Process according to one of the preceding Claims, characterised in that the whole-body deformation or an undesired deformation is subtracted from the total deformation.
18. Process according to Claim 17, characterised in that the undesired deformation is determined from a reference measurement.
19. Process according to Claim 17 or 18, characterised in that the subtraction of the whole-body deformation or undesired deformation from the total deformation in the images or phase images is performed prior to formation of the sum of the differentials between the images or phase images.
20. Apparatus for recording the deformation of objects (1) with a measuring device (2) for recording the sequence of images of the object (1) during the deformation of

said object, and with an evaluation device for forming the differential between two sequential images and for integrating the differential.

21. Apparatus according to Claim 20, characterised in that the measuring device exhibits an interferometry device.
22. Apparatus according to Claim 20, characterised in that the measuring device features a projection device.
23. Apparatus according to one of Claims 20 to 22, characterised by a device for determining phase images from the recorded images.
24. Apparatus according to one of Claims 20 to 23, characterised in that the measuring device encompasses a source for coherent radiation or coherent light or partially coherent radiation or partially coherent light.
25. Apparatus according to one of Claims 20 to 24, characterised by one or several laser diodes.
26. Apparatus according to one of Claims 20 to 25, characterised by a hand-held sensor.
27. Apparatus according to one of Claims 20 to 26, characterised by a device for visualisation of the recorded images or phase images as a film.

Abstract

A process serves to record the deformation of objects (1). In order to facilitate reliable evaluation even in the case of relatively large deformations, during the deformation of the object (1) a sequence or series of images of the object is recorded with a measuring process. The differential between two sequential images is formed. These differentials are integrated (Fig. 1).

Fig. 1

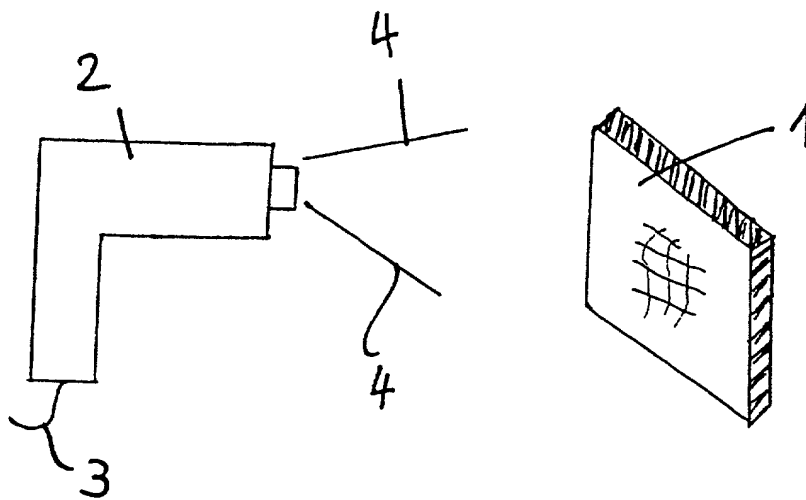
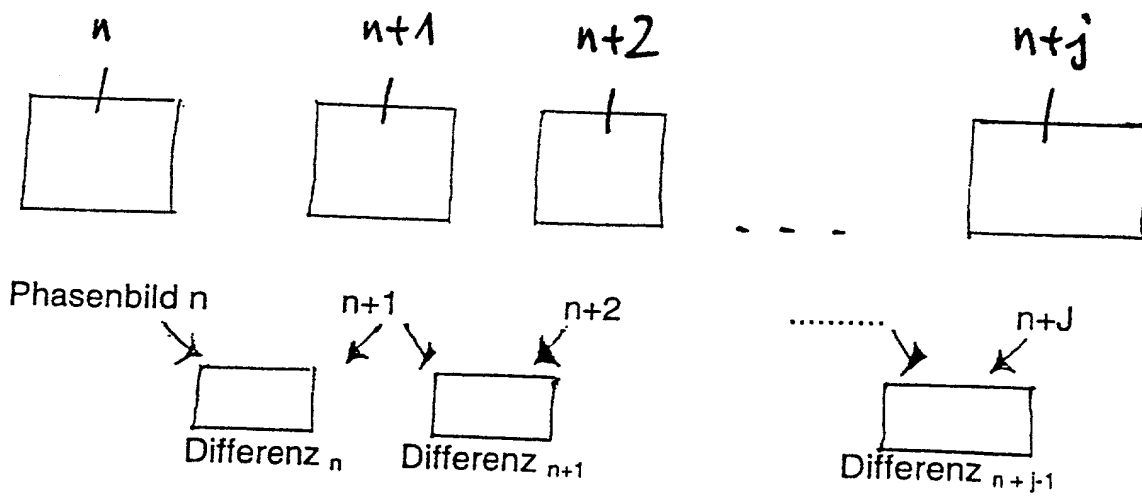


Fig. 2

Differenz aus Phasenbild $n+j$ und Phasenbild n

$$= \sum_{i=n}^{n+j-1} \text{Differenz}_i$$